

FIG.9

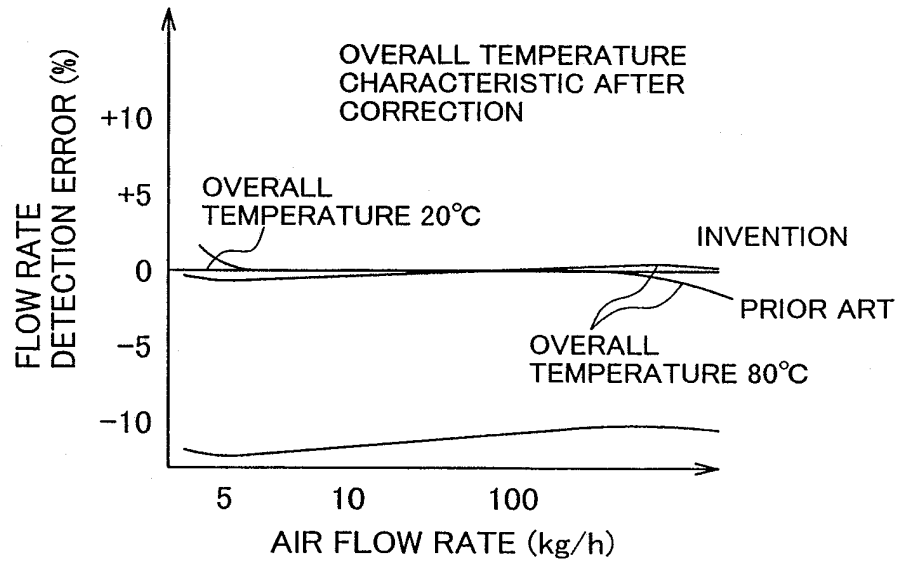


FIG.10

PRIOR ART

< TABLE 1 >

CORRECTION MAP FOR USE IN PRIOR ART

		AIR FLOW RATE		
		5kg/h	10kg/h	100kg/h
TEMPERATURE OF TEMPERATURE SENSOR	-40°C	-7 %	-5 %	-1 %
	20°C	0 %	0 %	0 %
	80°C	+ 7 %	+5 %	+1 %